
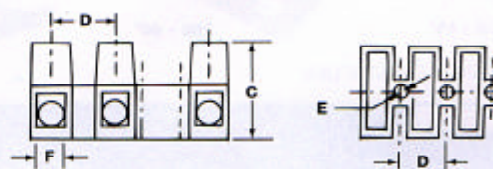


## Barrier Strips

- Recessed screws and tubular contacts provide added safety and help prevent short circuits
- Tubular contacts connect stripped, un-terminated solid or stranded wire directly to each contact
- Integrated wire protectors prevent twisting and breakage of stranded wire during connection
- Modular 12-circuit design can be cut into smaller sections, or stacked end-to-end
- Rugged nylon 66 housing, UL 94V2
- Operating temperature rated at 221°F (105°C)

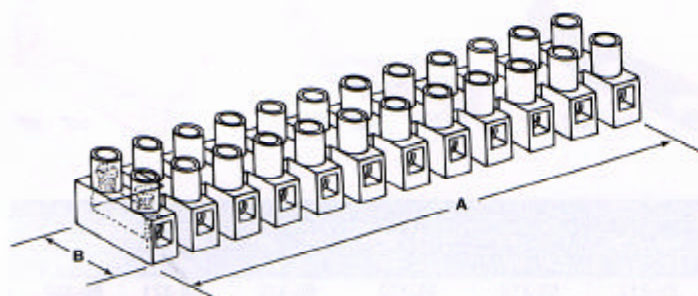

## Barrier Strips

Electrical Ratings	Wire Range (AWG)	No. of Circuits	Dimensions (Inches)							Dimensions (mm)						Cat. No.
			A	B	C	D	E	F*		A	B	C	D	E	F**	
20A/600V UL Listed	22 - 12	12	3.787	0.669	0.570	0.315	0.114	0.110		96.2	17.0	14.5	8.0	2.9	2.8	<b>89-608</b>
10A/400V CSA Certified	20 - 18															
30A/600V UL Listed	22 - 10	12	4.626	0.795	0.670	0.394	0.142	0.134		117.0	20.2	17.0	10.0	3.6	3.4	<b>89-610</b>
20A/400V CSA Certified	18 - 14															
35A/600V UL/CUL Listed	22 - 10	12	5.540	0.937	0.748	0.472	0.154	0.154		140.7	23.8	19.0	12.0	3.9	3.9	<b>89-612</b>
50A/600V UL/CUL Listed	20 - 8	12	6.220	1.008	0.992	0.531	0.173	0.189		158.0	25.6	25.2	13.5	4.4	4.8	<b>89-614</b>

\*Plus or minus .004 in.

\*\*Plus or minus 0.1mm

